

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 029 874 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
23.08.2000 Bulletin 2000/34

(51) Int. Cl.<sup>7</sup>: **C08F 232/00, C08F 240/00**

(21) Application number: **00102600.4**

(22) Date of filing: **08.02.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **16.02.1999 US 251282**

(71) Applicant:  
**THE GOODYEAR TIRE & RUBBER COMPANY  
Akron, Ohio 44316-0001 (US)**

(72) Inventors:  
• **Blok, Edward John  
Wadsworth, Ohio 44281 (US)**

• **Kraleovich, Mark Leslie, Jr.  
Copley, Ohio 44321 (US)**  
• **Wideman, Lawson Gibson  
Hudson, Ohio 44236 (US)**  
• **Sandstrom, Paul Harry  
Tallmadge, Ohio 44278 (US)**  
• **Ruscak, Joseph Miles  
Akron, Ohio 44313 (US)**

(74) Representative: **Leitz, Paul  
Goodyear Technical Center-Luxembourg  
Patent-Department  
L-7750 Colmar-Berg (LU)**

(54) **Polymeric resinous material derived from limonene, dicyclopentadiene and tertiary-butyl styrene**

(57) The present application relates to polymeric resinous material comprising

- (1) from 15 to 39 weight percent units derived from limonene;  
(2) from 15 to 39 weight percent units derived from dicyclopentadiene; and  
(3) from 46 to 70 weight percent units derived from tertiary-butyl styrene;  
wherein the sum of the weight percent units derived from limonene and dicyclopentadiene range from 30 to 54 weight percent units of the resin.

**EP 1 029 874 A1**

**Description**Background of the Invention

5 [0001] Polymeric resins have been used in treads of tires to improve traction. Unfortunately, one consequence of their use is a decrease in durability and treadwear.

[0002] Polymeric resinous materials containing units derived from piperylene, units derived from 2-methyl-2-butene and units derived from dicyclopentadiene are commercially available from The Goodyear Tire & Rubber Company under the designation WINGTACK® 115. These polymeric resinous materials find use in adhesives.

Summary of the Invention

10 [0003] The present invention relates to a polymeric resinous material derived from limonene, dicyclopentadiene and tert-butyl styrene.

Detailed Description of the Invention

15 [0004] There is disclosed a polymeric resinous material comprising

- 20 (a) from 15 to 39 weight percent units derived from limonene;  
 (b) from 15 to 39 weight percent units derived from dicyclopentadiene; and  
 (c) from 46 to 70 weight percent units derived from tertiary-butyl styrene;  
 wherein the sum of the weight percent units derived from limonene and dicyclopentadiene range from 30 to 54 weight percent units of the resin.

25 [0005] In addition, there is disclosed a rubber composition comprising (a) a diene-based elastomer containing olefinic unsaturation and (b) 1 to 80 phr of a polymeric resinous material comprising

- 30 (1) from 15 to 39 weight percent units derived from limonene;  
 (2) from 15 to 39 weight percent units derived from dicyclopentadiene; and  
 (3) from 46 to 70 weight percent units derived from tertiary-butyl styrene;  
 wherein the sum of the weight percent units derived from limonene and dicyclopentadiene range from 30 to 54 weight percent units of the resin.

35 [0006] In addition, there is disclosed a pneumatic tire having a tread comprised of (a) a diene-based elastomer containing olefinic unsaturation and (b) 1 to 80 phr of a polymeric resinous material comprising

- 40 (1) from 15 to 39 weight percent units derived from limonene;  
 (2) from 15 to 39 weight percent units derived from dicyclopentadiene; and  
 (3) from 46 to 70 weight percent units derived from tertiary-butyl styrene;  
 wherein the sum of the weight percent units derived from limonene and dicyclopentadiene range from 30 to 54 weight percent units of the resin.

45 [0007] The polymeric resinous material for use in the present invention comprises from 15 to 39 weight percent units derived from limonene; from 15 to 39 weight percent units derived from dicyclopentadiene; and 46 to 70 weight percent units derived from tertiary-butyl styrene. Preferably, the resin comprises from 22 to 27 weight percent units derived from limonene; from 22 to 27 weight percent units derived from dicyclopentadiene; and from 46 to 56 weight percent units derived from tertiary-butyl styrene.

50 [0008] In a particularly preferred embodiment, the weight ratio of units derived from limonene:dicyclopentadiene:tertiary-butyl styrene is 1:1:2.

[0009] The polymeric resin is particularly suited for use in a diene-based elastomer in an amount ranging from 1 to 80 phr (parts by weight per 100 parts by weight of rubber). Preferably, the polymeric resin is present in an amount ranging from 10 to 40 phr.

55 [0010] The resins may be prepared using various anhydrous metallic halide catalysts. Representative examples of such catalysts are fluorides, chlorides and bromides, of aluminum, tin and boron. Such catalysts include, for example, aluminum chloride, stannic chloride and boron trifluoride. Alkyl aluminum dihalides are also suitable, representative examples of which are methyl aluminum dichloride, ethyl aluminum dichloride and isopropyl aluminum dichloride.

[0011] In carrying out the polymerization reaction, the hydrocarbon mixture is brought into contact with the anhy-

drous halide catalyst. Generally, the catalyst is used in particulate form having a particle size in the range of from 5 to 200 mesh size, although larger or smaller particles can be used. The amount of catalyst used is not critical although sufficient catalyst must be used to cause a polymerization reaction to occur. The catalyst may be added to the olefinic hydrocarbon mixture or the hydrocarbon mixture may be added to the catalyst. If desired, the catalyst and mixture of hydrocarbons can be added simultaneously or intermittently to a reactor. The reaction can be conducted continuously or by batch process techniques generally known to those skilled in the art.

**[0012]** The reaction is conveniently carried out in the presence of a diluent because it is usually exothermic. Various diluents which are inert in that they do not enter into the polymerization reaction may be used. Representative examples of inert diluents are aliphatic hydrocarbons such as pentane, hexane, cyclohexane and heptane, aromatic hydrocarbons such as toluene, xylene and benzene, and unreacted residual hydrocarbons from the reaction.

**[0013]** A wide range of temperatures can be used for the polymerization reaction. The polymerization can be carried out at temperatures in the range of from -20°C to 100°C, although usually the reaction is carried out at a temperature in the range of from 0°C to 50°C. The polymerization reaction pressure is not critical and may be atmospheric or above or below atmospheric pressure. Generally, a satisfactory polymerization can be conducted when the reaction is carried out at about autogenous pressure developed by the reactor under the operating conditions used. The time of the reaction is not generally critical and reaction times can vary from a few seconds to 12 hours or more.

**[0014]** Upon completion of the reaction the hydrocarbon mixture is neutralized followed by isolation of the resin solution. The resin solution is steam-distilled with the resulting resin being allowed to cool.

**[0015]** The resins can optionally be modified by the addition of up to 25 weight percent of other unsaturated hydrocarbons and particularly hydrocarbons containing from 9 to 10 carbon atoms and mixtures thereof. Representative examples of such hydrocarbons are 3-methyl styrene, 4-methyl styrene, 1-methyl indene, 2-methyl indene, 3-methyl indene and mixtures thereof.

**[0016]** The resinous materials of this invention are characterized by having a Gardner color of from 2 to 10, a capillary tube melting point of from 100°C to 200°C, good heat stability and a specific gravity of from 0.85 to 1.0. They typically have a capillary tube melting point of 100°C to 200°C after steam-stripping to remove lower molecular weight compounds; although, when prepared in the presence of a chlorinated hydrocarbon solvent, their softening point is increased within that range. These resins are generally soluble in aliphatic hydrocarbons such as pentane, hexane, heptane and aromatic hydrocarbons such as benzene and toluene.

**[0017]** The tread of the tire of the present invention contains an elastomer containing olefinic unsaturation. The phrase "rubber or elastomer containing olefinic unsaturation" is intended to include both natural rubber and its various raw and reclaim forms as well as various synthetic rubbers. In the description of this invention, the terms "rubber" and "elastomer" may be used interchangeably, unless otherwise prescribed. The terms "rubber composition," "compounded rubber" and "rubber compound" are used interchangeably to refer to rubber which has been blended or mixed with various ingredients and materials and such terms are well known to those having skill in the rubber mixing or rubber compounding art. Representative synthetic polymers are the homopolymerization products of butadiene and its homologues and derivatives, for example, methylbutadiene, dimethylbutadiene and pentadiene as well as copolymers such as those formed from butadiene or its homologues or derivatives with other unsaturated monomers. Among the latter are acetylenes, for example, vinyl acetylene; olefins, for example, isobutylene, which copolymerizes with isoprene to form butyl rubber; vinyl compounds, for example, acrylic acid, acrylonitrile (which polymerize with butadiene to form NBR), methacrylic acid and styrene, the latter compound polymerizing with butadiene to form SBR, as well as vinyl esters and various unsaturated aldehydes, ketones and ethers, e.g., acrolein, methyl isopropenyl ketone and vinyl ethyl ether. Specific examples of synthetic rubbers include neoprene (polychloroprene), polybutadiene (including cis-1,4-polybutadiene), polyisoprene (including cis-1,4-polyisoprene), butyl rubber, styrene/isoprene/butadiene rubber, copolymers of 1,3-butadiene or isoprene with monomers such as styrene, acrylonitrile and methyl methacrylate, as well as ethylene/propylene terpolymers, also known as ethylene/propylene/diene monomer (EPDM) and, in particular, ethylene/propylene/dicyclopentadiene terpolymers. The preferred rubber or elastomers are polybutadiene and SBR.

**[0018]** In one aspect, the rubber is preferably of at least two of diene-based rubbers. For example, a combination of two or more rubbers is preferred such as cis 1,4-polyisoprene rubber (natural or synthetic, although natural is preferred), 3,4-polyisoprene rubber, styrene/isoprene/butadiene rubber, emulsion and solution polymerization derived styrene/butadiene rubbers, cis 1,4-polybutadiene rubbers and emulsion polymerization prepared butadiene/acrylonitrile copolymers.

**[0019]** In one aspect of this invention, an emulsion polymerization derived styrene/butadiene (E-SBR) might be used having a relatively conventional styrene content of 20 to 28 weight percent bound styrene or, for some applications, an E-SBR having a medium to relatively high bound styrene content; namely, a bound styrene content of 30 to 45 percent.

**[0020]** The relatively high styrene content of 30 to 45 for the E-SBR can be considered beneficial for a purpose of enhancing traction, or skid resistance, of the tire tread. The presence of the E-SBR itself is considered beneficial for a purpose of enhancing processability of the uncured elastomer composition mixture, especially in comparison to a utili-

zation of a solution polymerization prepared SBR (S-SBR).

[0021] By emulsion polymerization prepared E-SBR, it is meant that styrene and 1,3-butadiene are copolymerized as an aqueous emulsion. Such are well known to those skilled in such art. The bound styrene content can vary, for example, from 5 to 50 percent. In one aspect, the E-SBR may also contain acrylonitrile to form a terpolymer rubber, as E-SBAR, in amounts, for example, of 2 to 30 weight percent bound acrylonitrile in the terpolymer.

[0022] Emulsion polymerization prepared styrene/butadiene/acrylonitrile terpolymer rubbers containing 2 to 40 weight percent bound acrylonitrile in the terpolymer are also contemplated as diene-based rubbers for use in this invention.

[0023] The solution polymerization prepared SBR (S-SBR) typically has a bound styrene content in a range of 5 to 50, preferably 9 to 36, percent. The S-SBR can be conveniently prepared, for example, by organo lithium catalyzation in the presence of an organic hydrocarbon solvent.

[0024] A purpose of using S-SBR is for improved tire rolling resistance as a result of lower hysteresis when it is used in a tire tread composition.

[0025] The 3,4-polyisoprene rubber (3,4-PI) is considered beneficial for a purpose of enhancing the tire's traction when it is used in a tire tread composition. The 3,4-PI and use thereof is more fully described in US-A- 5,087,668. The T<sub>g</sub> refers to the glass transition temperature which can conveniently be determined by a differential scanning calorimeter at a heating rate of 10°C per minute.

[0026] The cis 1,4-polybutadiene rubber (BR) is considered to be beneficial for a purpose of enhancing the tire tread's wear, or treadwear. Such BR can be prepared, for example, by organic solution polymerization of 1,3-butadiene. The BR may be conveniently characterized, for example, by having at least a 90 percent cis 1,4-content.

[0027] The cis 1,4-polyisoprene (synthetic) and cis 1,4-polyisoprene natural rubber are well known to those having skill in the rubber art.

[0028] The term "phr" as used herein, and according to conventional practice, refers to "parts by weight of a respective material per 100 parts by weight of rubber, or elastomer."

[0029] In one embodiment, the rubber composition in the tread contains a sufficient amount of filler to contribute a reasonably high modulus and high resistance to tear. The filler may be added in amounts ranging from 5 to 250 phr. When the filler is silica, the silica is generally present in an amount ranging from 10 to 80 phr. Preferably, the silica is present in an amount ranging from 15 to 70 phr. When the filler is carbon black, the amount of carbon black will vary from 0 to 150 phr. Preferably, the amount of carbon black will range from 10 to 130 phr.

[0030] The commonly employed particulate precipitated silica used in rubber compounding applications can be used as the silica in this invention. These precipitated silicas include, for example, those obtained by the acidification of a soluble silicate; e.g., sodium silicate.

[0031] Such silicas might be characterized, for example, by having a BET surface area, as measured using nitrogen gas, preferably in the range of 40 to 600, and more usually in a range of 50 to 300 square meters per gram. The BET method of measuring surface area is described in the Journal of the American Chemical Society, Volume 60, page 304 (1930).

[0032] The silica may also be typically characterized by having a dibutylphthalate (DBP) absorption value in a range of 100 to 400, and more usually 150 to 300.


[0033] The silica might be expected to have an average ultimate particle size, for example, in the range of 0.01 to 0.05 micron as determined by the electron microscope, although the silica particles may be even smaller, or possibly larger, in size.

[0034] Various commercially available silicas may be considered for use in this invention such as, only for example herein, and without limitation, silicas commercially available from PPG Industries under the Hi-Sil trademark with designations 210, 243, etc; silicas available from Rhone-Poulenc, with, for example, designations of Z1165MP and Z165GR and silicas available from Degussa AG with, for example, designations VN2 and VN3, etc.

[0035] The processing of the sulfur vulcanizable rubber may be conducted in the presence of a sulfur containing organosilicon compound. Examples of suitable sulfur containing organosilicon compounds are of the formula:



in which Z is selected from the group consisting of

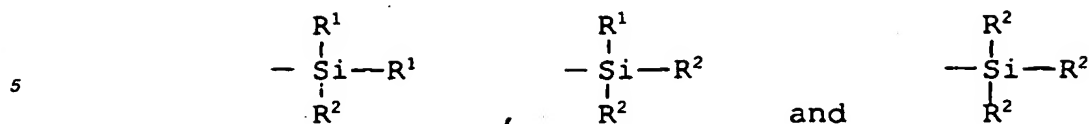

where

10  $\text{R}^1$  is an alkyl group of 1 to 4 carbon atoms, cyclohexyl or phenyl;

$\text{R}^2$  is alkoxy of 1 to 8 carbon atoms, or cycloalkoxy of 5 to 8 carbon atoms;


Alk is a divalent hydrocarbon of 1 to 18 carbon atoms and n is an integer of 2 to 8.

15 [0036] Specific examples of sulfur containing organosilicon compounds which may be used in accordance with the present invention include:

3,3'-bis(trimethoxysilylpropyl) disulfide,  
 3,3'-bis(triethoxysilylpropyl) tetrasulfide,  
 20 3,3'-bis(triethoxysilylpropyl) octasulfide,  
 3,3'-bis(trimethoxysilylpropyl) tetrasulfide,  
 2,2'-bis(triethoxysilylethyl) tetrasulfide,  
 3,3'-bis(trimethoxysilylpropyl) trisulfide,  
 3,3'-bis(triethoxysilylpropyl) trisulfide,  
 25 3,3'-bis(tributoxysilylpropyl) disulfide,  
 3,3'-bis(trimethoxysilylpropyl) hexasulfide,  
 3,3'-bis(trimethoxysilylpropyl) octasulfide,  
 3,3'-bis(trioctoxysilylpropyl) tetrasulfide,  
 3,3'-bis(trihexoxysilylpropyl) disulfide,  
 30 3,3'-bis(tri-2O-ethylhexoxysilylpropyl) trisulfide,  
 3,3'-bis(triisooctoxysilylpropyl) tetrasulfide,  
 3,3'-bis(tri-t-butoxysilylpropyl) disulfide,  
 2,2'-bis(methoxy diethoxy silyl ethyl) tetrasulfide,  
 2,2'-bis(tripropoxysilylethyl) pentasulfide,  
 35 3,3'-bis(tricyclohexoxysilylpropyl) tetrasulfide,  
 3,3'-bis(tricyclopentoxysilylpropyl) trisulfide,  
 2,2'-bis(tri-2O-methylcyclohexoxysilylethyl) tetrasulfide,  
 bis(trimethoxysilylmethyl) tetrasulfide,  
 3-methoxy ethoxy propoxysilyl 3'-diethoxybutoxysilylpropyltetrasulfide,  
 40 2,2'-bis(dimethyl methoxysilylethyl) disulfide,  
 2,2'-bis(dimethyl sec.butoxysilylethyl) trisulfide,  
 3,3'-bis(methyl butylethoxysilylpropyl) tetrasulfide,  
 3,3'-bis(di t-butylmethoxysilylpropyl) tetrasulfide,  
 2,2'-bis(phenyl methyl methoxysilylethyl) trisulfide,  
 45 3,3'-bis(diphenyl isopropoxysilylpropyl) tetrasulfide,  
 3,3'-bis(diphenyl cyclohexoxysilylpropyl) disulfide,  
 3,3'-bis(dimethyl ethylmercaptosilylpropyl) tetrasulfide,  
 2,2'-bis(methyl dimethoxysilylethyl) trisulfide,  
 2,2'-bis(methyl ethoxypropoxysilylethyl) tetrasulfide,  
 50 3,3'-bis(diethyl methoxysilylpropyl) tetrasulfide,  
 3,3'-bis(ethyl di-sec. butoxysilylpropyl) disulfide,  
 3,3'-bis(propyl diethoxysilylpropyl) disulfide,  
 3,3'-bis(butyl dimethoxysilylpropyl) trisulfide,  
 3,3'-bis(phenyl dimethoxysilylpropyl) tetrasulfide,  
 55 3-phenyl ethoxybutoxysilyl 3'-trimethoxysilylpropyl tetrasulfide, 4,4'-bis(trimethoxysilylbutyl) tetrasulfide,  
 6,6'-bis(triethoxysilylhexyl) tetrasulfide,  
 12,12'-bis(triisopropoxysilyl dodecyl) disulfide,  
 18,18'-bis(trimethoxysilyloctadecyl) tetrasulfide,

18,18'-bis(tripropoxysilyloctadecenyl) tetrasulfide,  
 4,4'-bis(trimethoxysilyl-bute'-2-yl) tetrasulfide,  
 4,4'-bis(trimethoxysilylcyclohexylene) tetrasulfide,  
 5,5'-bis(dimethoxymethylsilylpentyl) trisulfide,  
 3,3'-bis(trimethoxysilyl-2-methylpropyl) tetrasulfide,  
 3,3'-bis(dimethoxyphenylsilyl-2-methylpropyl) disulfide.


[0037] The preferred sulfur containing organosilicon compounds are the 3,3'-bis(trimethoxy or triethoxy silylpropyl) sulfides. The most preferred compound is 3,3'-bis(triethoxysilylpropyl) tetrasulfide. Therefore, as to Formula I, preferably Z is



where  $\text{R}^2$  is an alkoxy of 2 to 4 carbon atoms, with 2 carbon atoms being particularly preferred; Alk is a divalent hydrocarbon of 2 to 4 carbon atoms, with 3 carbon atoms being particularly preferred; and n is an integer of from 3 to 5, with 4 being particularly preferred.

[0038] The amount of the sulfur containing organosilicon compound of Formula I in a rubber composition will vary depending on the level of silica that is used. Generally speaking, the amount of the compound of formula II, if used, will range from 0.01 to 1.0 parts by weight per part by weight of the silica. Preferably, the amount will range from 0.05 to 0.4 parts by weight per part by weight of the silica.

[0039] The rubber compositions of the present invention may contain a methylene donor and a methylene acceptor. The term "methylene donor" is intended to mean a compound capable of reacting with a methylene acceptor (such as resorcinol or its equivalent containing a present hydroxyl group) and generate the resin in-situ. Examples of methylene donors which are suitable for use in the present invention include hexamethylenetetramine, hexaethoxymethylmelamine, hexamethoxymethylmelamine, lauryloxymethylpyridinium chloride, ethoxymethylpyridinium chloride, trioxan hexamethoxymethylmelamine, the hydroxy groups of which may be esterified or partly esterified, and polymers of formaldehyde such as paraformaldehyde. In addition, the methylene donors may be N-substituted oxymethylmelamines, of the general formula:

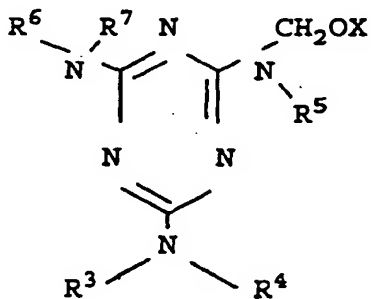

II

wherein X is an alkyl having from 1 to 8 carbon atoms,  $\text{R}^3$ ,  $\text{R}^4$ ,  $\text{R}^5$ ,  $\text{R}^6$  and  $\text{R}^7$  are individually selected from the group consisting of hydrogen, an alkyl having from 1 to 8 carbon atoms and the group  $-\text{CH}_2\text{OX}$ . Specific methylene donors include hexakis-(methoxymethyl)melamine, N,N',N''-trimethyl/N,N',N''-trimethylolmelamine, hexamethylolmelamine, N,N',N''-dimethylolmelamine, N-methylolmelamine, N,N'-dimethylolmelamine, N,N',N''-tris(methoxymethyl)melamine and N,N',N''-tributyl-N,N',N''-trimethylol-melamine. The N-methylol derivatives of melamine are prepared by known methods.

[0040] The amount of methylene donor and methylene acceptor that is present in the rubber stock may vary. Typically, the amount of methylene donor and methylene acceptor that are present will range from 0.1 phr to 10.0 phr. Preferably, the amount of methylene donor and methylene acceptor ranges from 2.0 phr to 5.0 phr for each.

[0041] The weight ratio of methylene donor to the methylene acceptor may vary. Generally speaking, the weight ratio will range from 1:10 to 10:1. Preferably, the weight ratio ranges from 1:3 to 3:1.

[0042] It is readily understood by those having skill in the art that the rubber composition would be compounded by methods generally known in the rubber compounding art, such as mixing the various sulfur-vulcanizable constituent rubbers with various commonly used additive materials. As known to those skilled in the art, depending on the intended use of the sulfur vulcanizable and sulfur-vulcanized material (rubbers), the additives mentioned below are selected and commonly used in conventional amounts. Representative examples of sulfur donors include elemental sulfur (free sulfur), an amine disulfide, polymeric polysulfide and sulfur olefin adducts. Preferably, the sulfur vulcanizing agent is elemental sulfur. The sulfur vulcanizing agent may be used in an amount ranging from 0.5 to 8 phr, with a range of from 1.5 to 6 phr being preferred. Typical amounts of processing oils comprise 1 to 50 phr. Such processing aids can include, for example, aromatic, naphthenic and/or paraffinic processing oils. Typical amounts of antioxidants comprise 1 to 5 phr. Representative antioxidants may be, for example, diphenyl-p-phenylenediamine and others, such as, for example, those disclosed in the Vanderbilt Rubber Handbook (1978), pages 344-346. Typical amounts of antiozonants comprise 1 to 5 phr. Typical amounts of fatty acids, if used, which can include stearic acid comprise 0.5 to 3 phr. Typical amounts of zinc oxide comprise 2 to 5 phr. Typical amounts of microcrystalline and paraffinic waxes comprise 1 to 10 phr. Often microcrystalline waxes are used. Typical amounts of peptizers comprise 0.1 to 1 phr. Typical peptizers may be, for example, pentachlorothiophenol and dibenzamido diphenyl disulfide.

[0043] Accelerators are used to control the time and/or temperature required for vulcanization and to improve the properties of the vulcanizate. In one embodiment, a single accelerator system may be used; i.e., primary accelerator. The primary accelerator(s) may be used in total amounts ranging from 0.5 to 4, preferably 0.8 to 1.5, phr. In another embodiment, combinations of a primary and a secondary accelerator might be used with the secondary accelerator being used in smaller amounts, such as from 0.05 to 3 phr, in order to activate and to improve the properties of the vulcanizate. Combinations of these accelerators might be expected to produce a synergistic effect on the final properties and are somewhat better than those produced by use of either accelerator alone. In addition, delayed action accelerators may be used which are not affected by normal processing temperatures but produce a satisfactory cure at ordinary vulcanization temperatures. Vulcanization retarders might also be used. Suitable types of accelerators that may be used in the present invention are amines, disulfides, guanidines, thioureas, thiazoles, thiurams, sulfenamides, dithiocarbamates and xanthates. Preferably, the primary accelerator is a sulfenamide. If a second accelerator is used, the secondary accelerator is preferably a guanidine, dithiocarbamate or thiuram compound.

[0044] The mixing of the rubber composition can be accomplished by methods known to those having skill in the rubber mixing art. For example, the ingredients are typically mixed in at least two stages; namely, at least one non-productive stage followed by a productive mix stage. The final curatives including sulfur vulcanizing agents are typically mixed in the final stage which is conventionally called the "productive" mix stage in which the mixing typically occurs at a temperature, or ultimate temperature, lower than the mix temperature(s) than the preceding non-productive mix stage(s). The rubber and polymeric resin are mixed in one or more non-productive mix stages. The terms "non-productive" and "productive" mix stages are well known to those having skill in the rubber mixing art.

[0045] Vulcanization of the pneumatic tire of the present invention is generally carried out at conventional temperatures ranging from 100°C to 200°C. Preferably, the vulcanization is conducted at temperatures ranging from 110°C to 180°C. Any of the usual vulcanization processes may be used such as heating in a press or mold, heating with superheated steam or hot air or in a salt bath.

[0046] The following examples are presented in order to illustrate but not limit the present invention.

[0047] Cure properties were determined using a Monsanto oscillating disc rheometer which was operated at a temperature of 150°C and at a frequency of 11 hertz. A description of oscillating disc rheometers can be found in the Vanderbilt Rubber Handbook edited by Robert O. Ohm (Norwalk, Conn., R. T. Vanderbilt Company, Inc., 1990), pages 554-557. The use of this cure meter and standardized values read from the curve are specified in ASTM D-2084. A typical cure curve obtained on an oscillating disc rheometer is shown on page 555 of the 1990 edition of the Vanderbilt Rubber Handbook.

[0048] In such an oscillating disc rheometer, compounded rubber samples are subjected to an oscillating shearing action of constant amplitude. The torque of the oscillating disc embedded in the stock that is being tested that is required to oscillate the rotor at the vulcanization temperature is measured. The values obtained using this cure test are very significant since changes in the rubber or the compounding recipe are very readily detected. It is obvious that it is normally advantageous to have a fast cure rate.

[0049] In the following examples, the Flexsys Rubber Process Analyzer (RPA) 2000 was used to determine dynamic mechanical rheological properties. The curing conditions were 160°C, 1.667 Hz, 15.8 minutes and 0.7 percent strain. A description of the RPA 2000, its capability, sample preparation, tests and subtests can be found in these references. H A Pawlowski and J S Dick, Rubber World, June 1992; J S Dick and H A Pawlowski, Rubber World, January 1997; and J S Dick and J A Pawlowski, Rubber & Plastics News, April 26 and May 10, 1993.

[0050] The compounded rubber sample is placed on the bottom die. When the dies are brought together, the sam-

ple is in a pressurized cavity where it will be subjected to a sinusoidal oscillating shearing action of the bottom die. A torque transducer connected to the upper die measures the amount of torque transmitted through the sample as a result of the oscillations. Torque is translated into the shear modulus, G, by correcting for the die form factor and the strain. The RPA 2000 is capable of testing uncured or cured rubber with a high degree of repeatability and reproducibility. The tests and subtests available include frequency sweeps at constant temperature and strain, curing at constant temperature and frequency, strain sweeps at constant temperature and frequency and temperature sweeps at constant strain and frequency. The accuracy and precision of the instrument allows reproducible detection of changes in the compounded sample.

[0051] The values reported for the storage modulus, (G'), loss compliance (J'') and tan delta are obtained from a strain sweep at 100°C and 1 Hz following the cure test. These properties represent the viscoelastic response of a test sample to shear deformation at a constant temperature and frequency.

#### EXAMPLE 1

[0052] Three hundred parts of cyclohexane and 50 parts of anhydrous aluminum chloride were placed into a reactor. While continuously stirring the mixture, 600 parts of a hydrocarbon mixture was slowly added to the reactor over a period of 60 minutes. The hydrocarbon mixture consisted of 30 percent inert hydrocarbons with the remaining 70 percent by weight of the mixture comprising the following resin forming components:

Component	Percent
Limonene	25.0
Dicyclopentadiene	25.0
t-Butyl Styrene	50.0

[0053] The temperature of the reaction was maintained in a range of 25° to 30°C. After an hour of agitation from the time of final addition, the hydrocarbon mixture was added to approximately 4,000 parts of a 25 percent solution of isopropyl alcohol in water to neutralize and decompose the aluminum chloride. The aqueous layer was removed and the resin solution washed with an additional 4,000 parts of the alcohol/water blend.

[0054] The resulting resin solution was steam-distilled at a pot temperature of 235°C. The resulting residual molten resin was poured from the pot onto an aluminum tray and cooled to room temperature to form 400 parts of a hard brittle pale yellow resin having a capillary tube melting point of 120 to 156°C. Small molecule GPC analysis gives a molecular weight distribution of 8.4 percent in the 11,000 MW range, 84.7 percent in the 2400 MW range, 2.4 percent in the 520 MW range and 3.3 percent in the 400 MW range.

#### EXAMPLE 2

[0055] In this example, various resins were evaluated in a rubber compound.

[0056] Rubber compositions containing the materials set out in Tables 1 and 2 were prepared in a BR Banbury mixer using two separate stages of addition (mixing); namely, one non-productive mix stage and one productive mix stage. The non-productive stage was mixed for 3.5 minutes or to a rubber temperature of 160°C, whichever occurred first. The mixing time for the productive stage was to a rubber temperature of 108°C.

[0057] The rubber compositions are identified herein as Samples 1-3. Samples 1 and 2 are considered herein as controls without the use of the resin used in the present invention being added to the rubber composition. Samples 1 and 2 each contain commercially available resins.

[0058] The samples were cured at 150°C for 28 minutes.

[0059] Table 2 illustrates the behavior and physical properties of the cured Samples 1-3.

[0060] Lab data reveals that the new DCPD/Limonene/Tertiary Butyl Styrene resin enhances the dry traction and durability properties simultaneously. Generally, increasing a compound's durability reduces its dry traction. Comparing the dynamic properties (RPA 2000) and stress-strain data (ATS) of the Coumarone-Indene (Sample 2) and phenolic resins (Sample 1), the typical tradeoff of sacrificing durability (lower G' at 40 percent strain, 300 percent modulus and tensile strength) for improved dry traction (increased tan delta and loss compliance at 40 percent strain) is demonstrated. Sample 1 (phenolic resin) is a soft compound with high hysteresis. Sample 2 (Coumarone-Indene resin) is a stiff compound with low hysteresis.

[0061] The DCPD/Limonene/Tertiary Butyl Styrene resin versus Sample 1 shows that the durability is significantly



improved (G' at 40 percent strain, 300 percent modulus and tensile strength) and dry traction is improved (tan delta and J" at 40 percent). The DCPD/Limonene/Tertiary Butyl Styrene resin versus the Sample 2 shows that the durability is only slightly reduced (G' at 40 percent strain, 300 percent modulus and tensile strength) and the dry traction is significantly improved (tan delta and J" at 40 percent). The DCPD/Limonene/Tertiary Butyl Styrene resin shows the best tradeoff between durability and dry traction.

Table 1

Samples	Control 1	Control 2	3
Non-Productive			
Solution SBR <sup>1</sup>	100	100	100
Carbon Black <sup>2</sup>	88	50	88
Aromatic Oil	50	50	50
Stearic Acid	0.96	0.96	0.96
Zinc Oxide	1.20	1.20	1.20
Antioxidant <sup>3</sup>	0.67	0.67	0.67
Phenolic Resin <sup>4</sup>	21.5	0	0
Coumarone Indene <sup>5</sup> Resin	0	21.5	0
Resin of Example 1	0	0	21.5
Productive			
Accelerators <sup>6</sup>	2.4	2.4	2.4
Accelerator <sup>7</sup>	0.20	0.20	0.20
Sulfur	1.22	1.22	1.22

<sup>1</sup> Solution SBR containing 32% styrene a Tg of -17°C and a base Mooney of 88 when oil extended (20 phr oil) the Mooney was 45. The solution SBR was obtained from The Goodyear Tire & Rubber Company.

<sup>2</sup> I<sub>2</sub>=122 and DBP=114

<sup>3</sup> Polymerized 1,2-dihydro-2,2,4-trimethylquinoline

<sup>4</sup> Unreactive phenol-formaldehyde resin having a softening point of 106-114°C (Ring and Ball) which is commercially available from Schenectady Chemical under the designation CRJ-418.

<sup>5</sup> Coumarone Indene Resin having a softening point of 100°C which is commercially available from Neville Chemical under the designation Cumar? R-13.

<sup>6</sup> N-cyclohexyl benzothiazole-2-sulfenamide

<sup>7</sup> Tetramethyl thiuram disulfide

Table 2

Sample	1	2	3
Phenolic resin	21.5	0	0
Coumarone Indene Resin	0	21.51	0
Resin of Ex. 1	0	0	21.5
Rheometer 150°C			
T25 (min)	8.25	12.3	7.1
T90 (min)	18.3	17.05	23.95
Min Torque	6.97	7.43	9.04
Max Torque (36')	18.07	22.82	22.51
Delta Torque	11.1	15.39	13.47
Final Torque (60')	18.17	22.97	22.65
RPA 2000			
G' 40% (KPa)	386	456	428
Tan Delta 40%	0.253	0.256	0.315
J" 40% 1/MPa	0.61	0.53	0.067
ATS, cure 28 minutes @ 150°C			
300% Modulus, MPa	3.51	5.13	4.96
Break Strength, MPa	8.50	10.30	9.52
Elongation, %	627	572	576
Rebound RT	8.2	8.2	8.6
Rebound 100°C	28.9	32.0	31.8

### Claims

1. A polymeric resinous material characterized by:

- (a) from 15 to 39 weight percent units derived from limonene;
- (b) from 15 to 39 weight percent units derived from dicyclopentadiene; and
- (c) from 46 to 70 weight percent units derived from tertiary-butyl styrene; wherein the sum of the weight percent units derived from limonene and dicyclopentadiene range from 30 to 54 weight percent units of the resin..

2. The polymeric resinous material according to claim 1 characterized by a capillary tube melting point of from 100°C to 200°C.

3. The polymeric resinous material according to claim 1 characterized in that the polymeric resinous material is modified by containing up to 25 weight percent units derived from other unsaturated hydrocarbons containing from 9 to 10 carbon atoms.

4. A rubber composition comprising (a) a diene-based elastomer containing olefinic unsaturation and (b) 1 to 80 phr of a polymeric resinous material according to any of the preceding claims.

5. The rubber composition according to claim 4 characterized by the polymeric resinous material having a capillary tube melting point of from 100°C to 200°C.

6. The rubber composition according to claim 4 wherein the polymeric resinous material is modified by containing up to 25 weight percent units derived from other unsaturated hydrocarbons containing from 9 to 10 carbon atoms.
- 5 7. The rubber composition according to claim 4 wherein said elastomer containing olefinic unsaturation is selected from the group consisting of natural rubber, neoprene, polyisoprene, polybutadiene, styrene-butadiene copolymer, styrene/isoprene/butadiene rubber, methyl methacrylate-butadiene copolymer, isoprene-styrene copolymer, methyl methacrylate-isoprene copolymer, acrylonitrile-isoprene copolymer, acrylonitrile-butadiene copolymer, EPDM and mixtures thereof.
- 10 8. The rubber composition according to claim 4 wherein a filler is present in said elastomer in an amount ranging from 10 to 250 phr.
9. A pneumatic tire having a tread characterized by a rubber composition according to any of claims 4-8.

15

20

25

30

35

40

45

50

55



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 10 2600

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL7)
E	EP 0 990 669 A (GOODYEAR TIRE & RUBBER) 5 April 2000 (2000-04-05) * the whole document *	1-9	C08F232/00 C08F240/00
A	US 5 691 432 A (WILLIAMS THEODORE JOSEPH) 25 November 1997 (1997-11-25) * abstract; claims 1-23 * * column 5, line 9-21,30-40 * * column 6, line 39-60 *	1-9	
A	EP 0 074 273 A (MITSUI PETROCHEMICAL IND) 16 March 1983 (1983-03-16) * abstract; claims 1-10 * * page 2, line 3-14 * * page 4, line 12-30 * * page 9, line 5-8 * * page 17, line 24-37 * * page 18, line 24 *	1-9	
A	DATABASE WPI Section Ch, Week 198608 Derwent Publications Ltd., London, GB; Class A18, AN 1986-051811 XP002136626 & JP 61 004711 A (MITSUI PETROCHEM IND CO LTD), 10 January 1986 (1986-01-10) * abstract *	1-9	TECHNICAL FIELDS SEARCHED (InCL7) C08F
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>28 April 2000</b>	Examiner <b>Bergmans, K</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons</p> <p>&amp;: member of the same patent family, corresponding document</p>			

EP 0 1029 874 A1 (2000/04/05)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 10 2600

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-04-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0990669	A	05-04-2000	NONE		
US 5691432	A	25-11-1997	US	5410004 A	25-04-1995
			US	5693731 A	02-12-1997
			CA	2140565 A	25-07-1995
			DE	69508813 D	12-05-1999
			DE	69508813 T	05-08-1999
			EP	0665246 A	02-08-1995
			JP	8048723 A	20-02-1996
EP 0074273	A	16-03-1983	JP	1401340 C	28-09-1987
			JP	58042610 A	12-03-1983
			JP	62007209 B	16-02-1987
			CA	1234248 A	15-03-1988
			DE	3274113 D	11-12-1986
			US	4513130 A	23-04-1985
			US	4533700 A	06-08-1985
JP 61004711	A	10-01-1986	JP	1626103 C	28-11-1991
			JP	2054844 B	22-11-1990

EPO FORM P4489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82